

DT - 3076

Guard Fill - Petrol (GFP)

Guard Fill - Petrol



Product properties

The Guard Fill-Petrol keeps inlet valves, injection nozzles and combustion chambers free of coke residues, reduces friction in the engine and protects all metal surfaces from corrosion. The Guard Fill additive package reduces petrol consumption up to 3 percent and can even reduce engine out emission up to 35%. Humidity and condensed water gets removed and the upper cylinder area is well lubricated and protected. Guard-Fill keeps the engine in good condition during its entire life.

Benefits:

- reduces nozzle contamination
- prevents coke residues
- perfect Anti-Foam properties
- perfect corrosion protection
- elevates the octane level
- protects the fuel system from water and humidity
- improved fuel stability
- compatible with engine and fuel system material



Application Area

Motor vehicles, motorcycles and other high performance engines (e.g. ships and boats, Go-Karts, racing motors, lawn mowers, etc.)



Application

Add to the fuel system before filling up.



Consumption

300 ml in 80 l tank volume (Dosage ratio: 1:1000)



Reaction time

Works during operation




Technical data

Physical state: liquid
Colour: yellow
Odour: characteristic
Flashpoint: > 61 °C
Ignition temperature: > 200 °C
Density at 68 °F: 0.80-0.84 g/cm³
Water resistant



Available size

1L 5L 10L 25L 200L

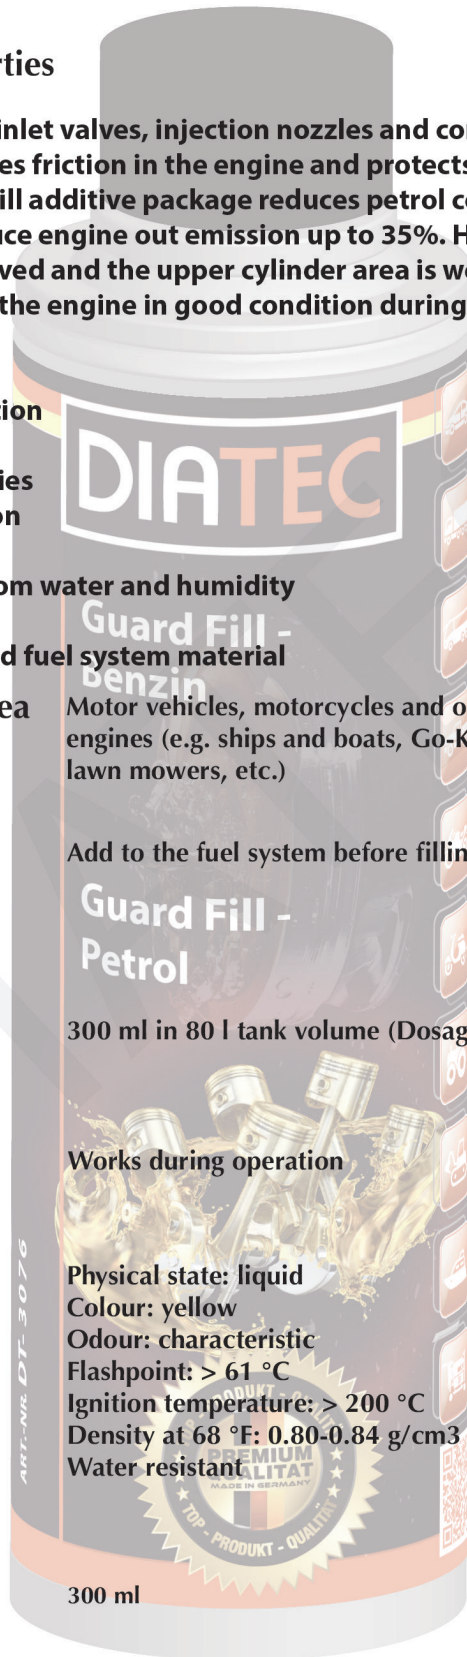

Product Information

Produktinformation



Diatec International GmbH
Neuköllner Str 203 - 12357 Berlin
Email : info@dticc.com
Website : www.dticc.com
TEL: 0049177588641 / 00493098539728

DIATEC®

Our information is based on careful examination and may be considered as reliable. However, all information supplied is a non-binding advise. No liability for printing errors, technical modifications and errors excepted.



Made in Germany