

# DT-4036

## Diesel System Cleaner (DSC) Diesel System Cleaner

### Product Information Produktinformation



#### Product properties

Diesel System Cleaner removes operationally caused contamination sustained throughout the fuel system of diesel engines from the tank to the combustion chambers. It removes resin deposits, releases sticking injection nozzles and injection pumps removes carbon residues and soot deposits within the entire upper cylinder area. It also lubricates and protects the diesel injection system and the entire upper cylinder area. Further the product prevents the oxidation of the fuel and the growth of microorganisms. The fuel atomization is improved.



#### Area of application

For use in diesel powered engines. Recommended for engines with particle filter, turbo and catalytic converter.



#### Application

Fill directly into the diesel tank before refueling or by using special cleaning equipment.



#### Consumption

300 ml treats up to 80 liters diesel. Mixing ratio: 1:200



#### Reaction time

while engine is running




#### Technical data

Physical state: liquid  
Colour: brown  
Initial boiling point and boiling range: 200 - 210 °C  
Flashpoint: 45 °C  
Lower explosion limit: > 0,6 Vol.-%  
Upper explosion limit: > 7,0 Vol.-%  
Ignition temperature: > 200 °C  
Vapour pressure (at 68 °F): > 8 hPa  
Density at 68 °F: 0.83 - 0.86 g/cm<sup>3</sup>



#### Available size

1L 5L 10L 25L 200L

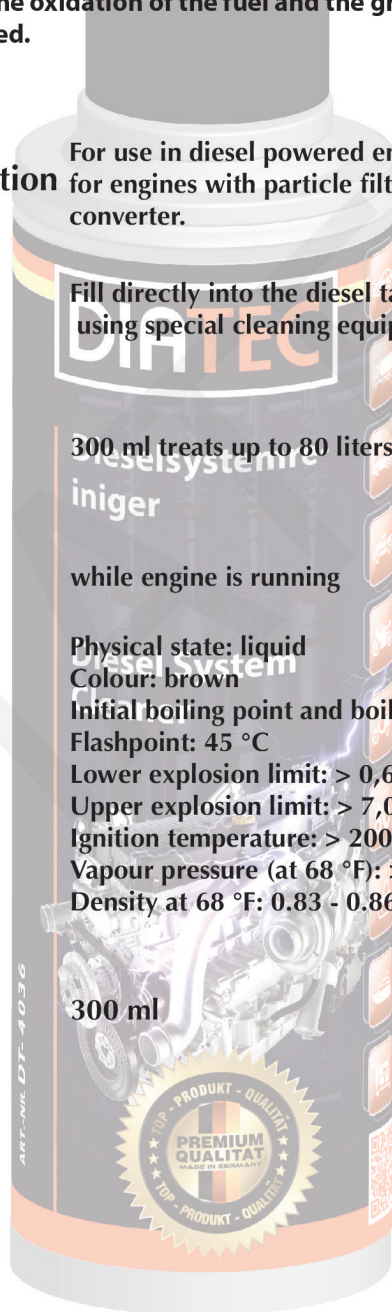

Diatec International GmbH  
Neuköllner Str 203 - 12357 Berlin  
Email : [info@dticc.com](mailto:info@dticc.com)  
Website : [www.dticc.com](http://www.dticc.com)  
TEL: 0049177588641 / 00493098539728

# DIATEC®

Unsere technischen Informationen stützen sich auf sorgfältige Untersuchungen und wurden nach dem neuesten Stand zusammengestellt. Dennoch kann Sie dieses Dokument nur unverbindlich beraten, da Anwendung und Verarbeitungsmethoden nicht in unserem Einfluss liegen. Keine Haftung für Druckfehler. Technische Änderungen vorbehalten.



Made in Germany