

DT-4056

Cetane Booster (CB)

Cetane Booster



Product properties

Cetane Booster increases the cetane number of the diesel fuel of up to 5 points. The product is the best for diesel fuel of lower quality. It reduces the "engine knocking", produces an even and powerful combustion, reduces soot and prevents overheating that is due to the low cetane number auf the diesel fuel.



Area of application

For use in diesel powered engines. Recommended for engines with particle filter, turbo and catalytic converter.



Application

Fill directly into the diesel tank. Observe mixing ratio.



Consumption

300 ml sufficient for 80 liters diesel. Mixing ratio: 1:200



Reaction time

While engine is running




Technical data

Physical state: liquid
Colour: clear/colourless
Odour: aromatic
Initial boiling point and boiling range: 180 - 220 °C
Flashpoint: > 65 °C
Lower explosion limit: 0,73 Vol.-%
Upper explosion limit: 6 Vol.-%
Ignition temperature: > 200 °C
Density at 68 °F: 0,83 - 0,84 g/cm³
Water resistant



Available size

1L 5L 10L 25L 200L

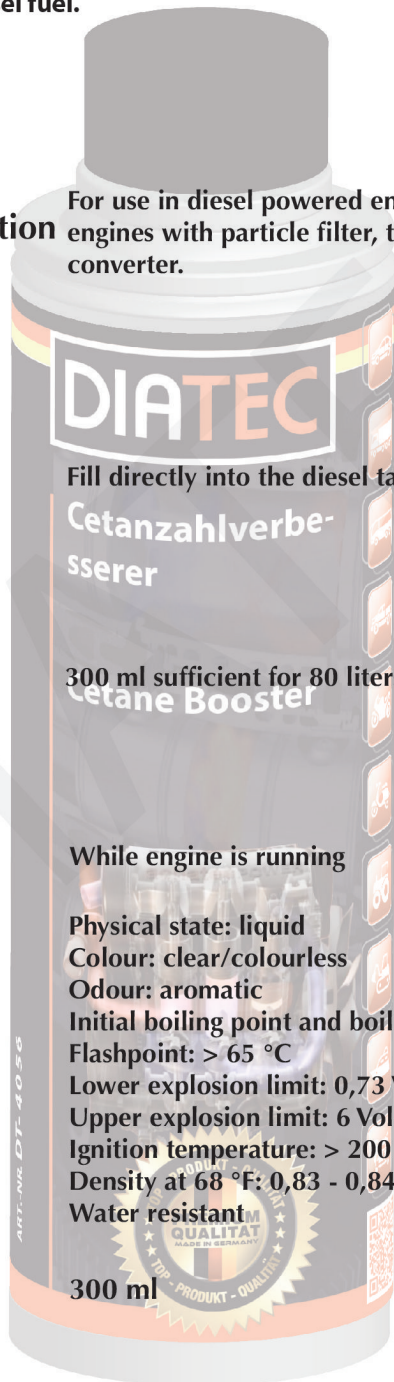

Product Information

Produktinformation



Diatec International GmbH
Neuköllner Str 203 - 12357 Berlin
Email : info@dticc.com
Website : www.dticc.com
TEL: 0049177588641 / 00493098539728

DIATEC®

Our information is based on careful examination and may be considered as reliable. However, all information supplied is a non-binding advise. No liability for printing errors, technical modifications and errors excepted.



Made in Germany