

# DT-4086

## Diesel Fuel Stabilizer (DFS)

Diesel Fuel Stabilizer

### Product Information

Produktinformation



#### Product properties

Diesel Fuel Stabilizer is a high-activity product which improves the operational characteristics of all diesel fuels that have been stored for an extended period of time.

#### Benefits:

- prevents fuel aging
- reduces deposits and resination
- provides optimum lubrication in the whole fuel system
- condensing water is bound
- prevents corrosion
- reduces foaming when the fuel is filled in a tank
- optimized exhaust emissions
- protects the environment



**Area of application** Perfectly suited for all diesel and diesel-biodiesel fuels.



#### Application

Adding the product of a lengthy storage period (1/2- 2 years) of diesel fuel.



#### Consumption

300 ml product per 1,000 litre fuel



#### Reaction time

While engine is running




#### Technical data

Physical state: liquid  
Colour: brown  
Odour: characteristic  
Initial boiling point and boiling range: 200 - 210 °C  
Flashpoint: > 60 °C  
Lower explosion limit: > 0,6 Vol.-%  
Upper explosion limit: > 7,0 Vol.-%  
Ignition temperature: > 200 °C  
Vapour pressure (at 68 °F): > 8 hPa  
Density at 68 °F: ca. 0.81 g/cm3  
Water resistant



#### Available size

1L 5L 10L 25L 200L

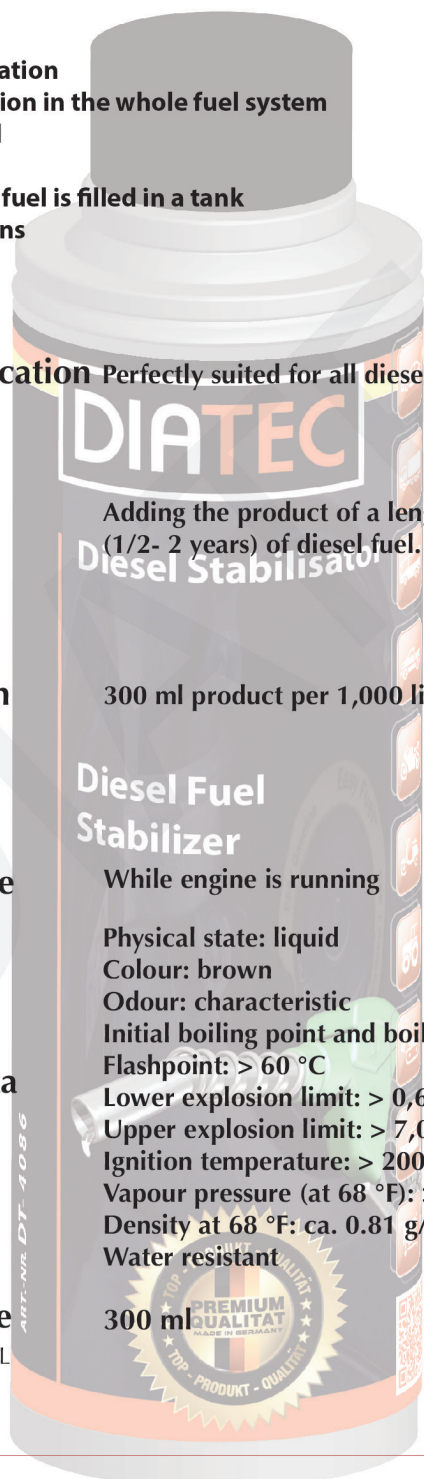

Diatec International GmbH  
Neuköllner Str 203 - 12357 Berlin  
Email : [info@dticc.com](mailto:info@dticc.com)  
Website : [www.dticc.com](http://www.dticc.com)  
TEL: 0049177588641 / 00493098539728

# DIATEC®

Our information is based on careful examination and may be considered as reliable. However, all information supplied is a non-binding advise. No liability for printing errors, technical modifications and errors excepted.



Made in Germany