

DT-4076

Diesel Anti Smoke (DAS)

Diesel Anti Smoke

Product Information

Produktinformation



Product properties

Diesel Anti Smoke significantly reduces exhaust smoke and unpleasant knocking of all stationary and mobile diesel engines. It increases the Cetane number of diesel fuels. The product ensures perfect lubrication of all moving parts within the diesel system and therefore provides a clean and powerful combustion. Protects the complete system against corrosion.



Area of application

For use in diesel powered engines. Recommended for engines with particle filter, turbo and catalytic converter.



Application

Fill directly into the diesel tank.
Observe the mixing ratio!



Consumption

300 ml sufficient for 60 liters diesel. Mixing ratio: 1:400



Reaction time

while engine is running




Technical data

Physical state: liquid
Colour: yellow
Odour: characteristic
Initial boiling point and boiling range: 200 - 210 °C
Flashpoint: > 65 °C
Lower explosion limit: > 0,6 Vol.-%
Upper explosion limit: > 7,0 Vol.-%
Ignition temperature: > 200 °C
Density at 68 °F: 0,810 - 0,825 g/cm³
Water resistant



Available size

1L 5L 10L 25L 200L

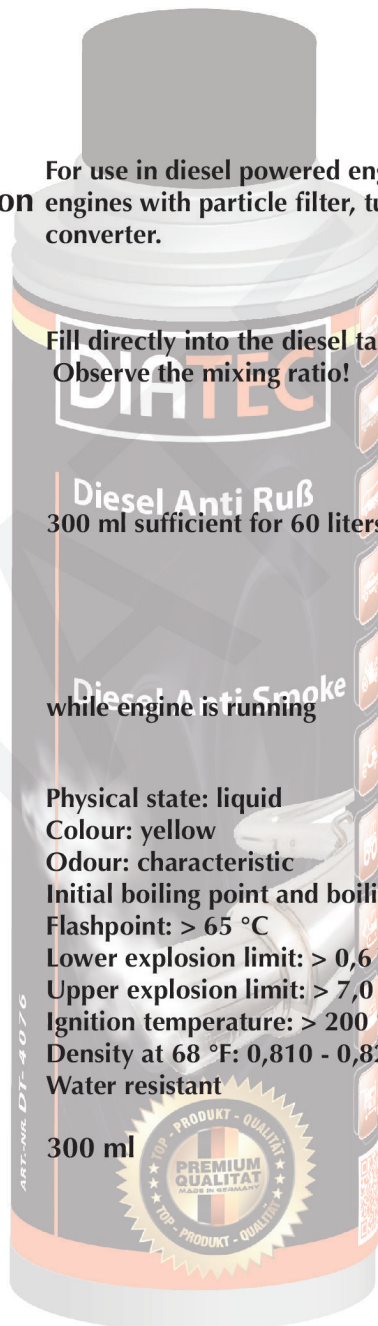

Diatec International GmbH
Neuköllner Str 203 - 12357 Berlin

TEL: 0049177588641 / 00493098539728

Website : www.dticc.com
Email : info@dticc.com

DIATEC®

Our information is based on careful examination and may be considered as reliable. However, all information supplied is a non-binding advise. No liability for printing errors, technical modifications and errors excepted.



Made in Germany