

DT-4096

Diesel Anti-Bacteria 1:200 (DAB)

Diesel Anti Bacteria


Product Information

Produktinformation



Product properties

Diesel Anti-Bactericide disinfects the complete diesel system. Destroys bacteria, fungus and algae. It prevents new growth and hinders the blockage of the fuel filter.

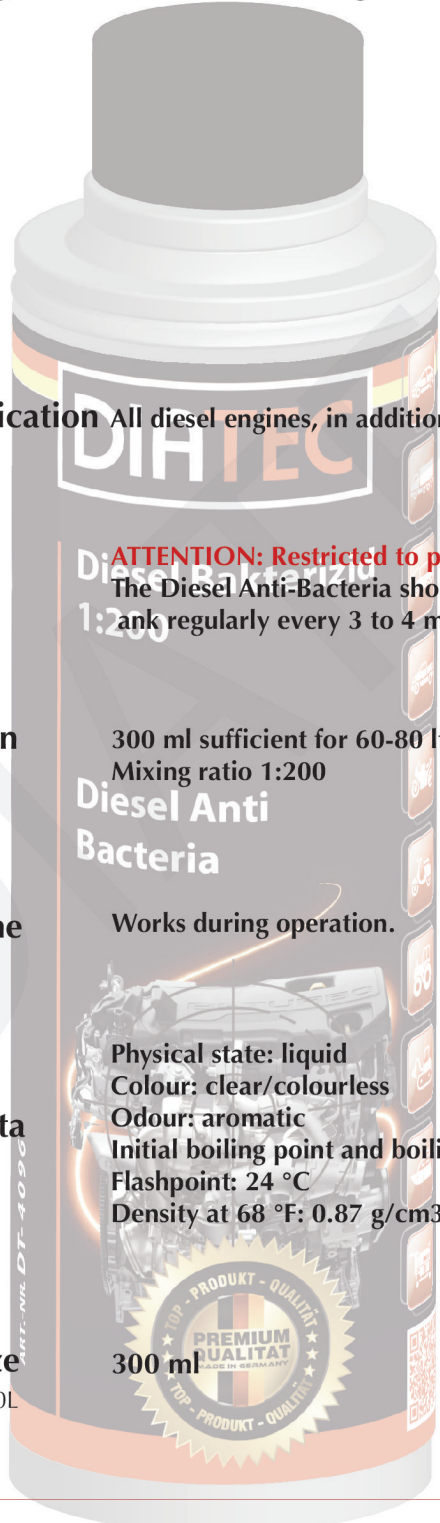

Area of application All diesel engines, in addition to the fuel tank.



Application

ATTENTION: Restricted to professional users!
The Diesel Anti-Bacteria should be added to the fuel tank regularly every 3 to 4 months.



Consumption

300 ml sufficient for 60-80 ltr. Diesel.
Mixing ratio 1:200



Reaction time

Works during operation.



Technical data

Physical state: liquid
Colour: clear/colourless
Odour: aromatic
Initial boiling point and boiling range: 135 - 145 °C
Flashpoint: 24 °C
Density at 68 °F: 0.87 g/cm³



Available size

300 ml
1L 5L 10L 25L 200L



Diatec International GmbH
Neuköllner Str 203 - 12357 Berlin
Email : info@dticc.com
Website : www.dticc.com
TEL: 0049177588641 / 00493098539728

DIAITEC®

Our information is based on careful examination and may be considered as reliable. However, all information supplied is a non-binding advise. No liability for printing errors, technical modifications and errors excepted.



Made in Germany