

DT-4066

Product Information Diesel Conditioner & Anti-Gel 1:1000 Produktinformation Dieselschutz Winter Auto 1:1000



Product properties

High performance diesel system protection for improving the flow of diesel fuels suitable for all engine systems such as common rail or direct injection. Winter-proof up to -27.4°F (depending on the quality of the fuel). The thickening of the diesel fuel in extreme cold conditions is prevented and thus the operational reliability is increased especially in the winter. Fuel filters and pipes are provided from clogging and this improves cold-start performance and warm-up phase.
Optimal lubrication of all moving parts of the Diesel Systems.



Area of application

In allen Dieselaggregaten. Geeignet für Katalysatoren Rußpartikelfilter und Turbolader.



Application

Fill directly into the diesel tank. Observe mixing ratio. Apply as possible at temperatures above 32°F and before the diesel is gelling. At temperatures below -4°F can no longer be ensured mixing with the diesel fuel. Store frostproof!



Consumption

1 liter sufficient for 1000 liters diesel.
Mixing ratio: 1:1000



Reaction time

while engine is running
Diesel Conditioner
& Anti-Gel 1:1000




Technical data

Physical state: liquid
Colour: clear/colourless
Odour: characteristic
Pourpoint: -9°C
Flashpoint: $\sim 62^{\circ}\text{C}$
Density at 68°F : 0,84 - 0,86 g/cm³
Viscosity / kinematic (at 104°F): 12,7 mm²/s



Available size

1L 5L 10L 25L 200L

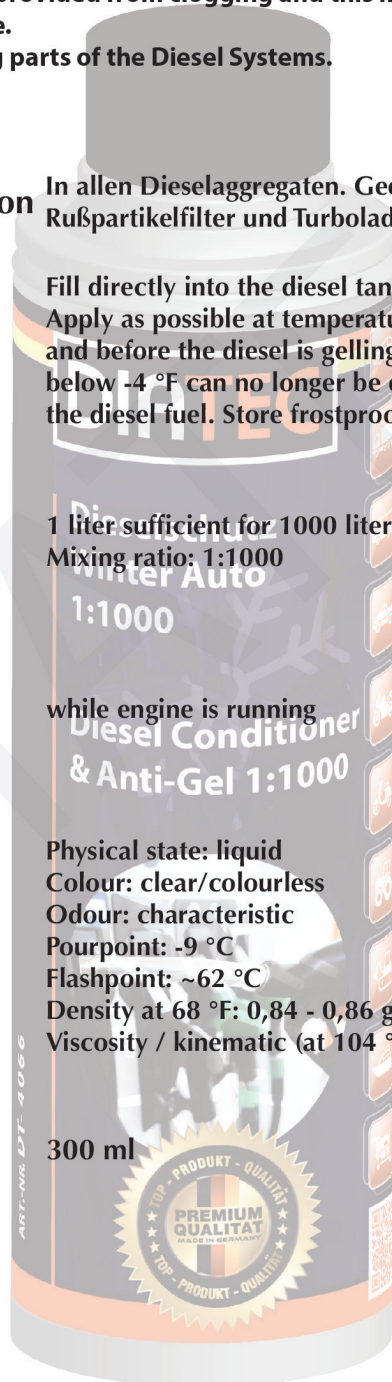

Diatec International GmbH
Neuköllner Str 203 - 12357 Berlin
Email : info@dticc.com
Website : www.dticc.com
TEL: 0049177588641 / 00493098539728

DIATEC®

Our information is based on careful examination and may be considered as reliable. However, all information supplied is a non-binding advise. No liability for printing errors, technical modifications and errors excepted.



Made in Germany