

DT-2016

Automatic Transmission Cleaner

Automatic Transmission Cleaner

Product Information

Produktinformation



Product Properties:

DIATEC Automatic Transmission Cleaner solves and reliably removes resins, oxidized oil residues, operational deposits and impurities in the transmission oil circuit. The automatic gearbox cleans the entire system. It has a noise-reducing effect and ensures a safe and easy-to-operate gear shift, optimizes the switching behavior and avoids costly repairs.



Application Area For all kinds of automatic transmissions



Application

Add the product to the automatic transmissions oil system before changing the oil. Caution: Do not overfill the system. Run the system for approx. 10-15 minutes under frequent load alteration. Afterwards change of the transmission oil accordance to the manufacturer's instructions.



Consumption

300 ml sufficient for 1 vehicle, Mixing Ratio 1:10



Reaction time

approx. 10-15 min.




Technical data

Physical state: liquid
Colour: Blue
Odour: aromatic
Initial boiling point and boiling range: 180 - 220 °C
Flashpoint: 63 °C
Ignition temperature: > 200 °C
Vapour pressure (at 68 °F): 20 hPa
Density at 68 °F: 0.82 - 0.90 g/cm³
Water resistant



Available size

300 ml
1L 5L 10L 25L 200L

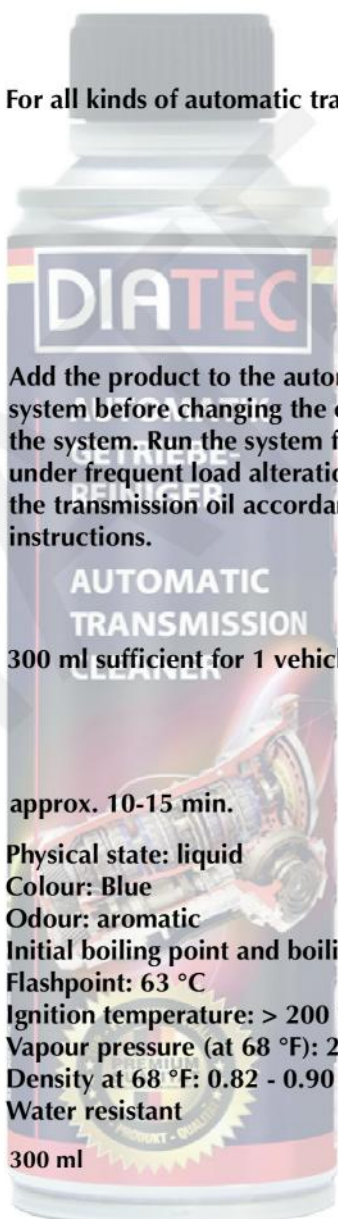

Diatec International Gmbh
Neuköllner Str 203 - 12357 Berlin Email : info@dticc.com

Website : www.dticc.com
TEL: 0049177588641 / 00493098539728

DIATEC®

unsere technischen informationen stützen sich auf sorgfältige Untersuchungen und wurden nach dem neuesten stand zusammengestellt. Dennoch kann sie nur unverbindlich beraten, da Anwendung und Verarbeitungsmethoden nicht in unserem Einfluss liegen. Keine Haftung für Druckfehler. Technische Änderungen vorbehalten

Our information is based on careful examination and may be considered as reliable. However, all information supplied is a non-binding advise. No liability for printing errors, technical modifications and errors excepted.



Made in Germany