

# DT-4046

## Diesel Conditioner & Anti-Gel 1:200

Diesel Conditioner & Anti-Gel 1:200

### Product Information

Produktinformation



#### Product properties

High performance diesel system protection for improving the flow of diesel fuels suitable for all engine systems such as common rail or direct injection. Winter-proof up to  $-27.4^{\circ}\text{F}$  (depending on the quality of the fuel). The thickening of the diesel fuel in extreme cold conditions is prevented and thus the operational reliability is increased especially in the winter. Fuel filters and pipes are provided from clogging and this improves cold-start performance and warm-up phase. Optimal lubrication of all moving parts of the Diesel Systems.



#### Area of application

For use in diesel powered engines. Recommended for engines with particle filter, turbo and catalytic converter.



#### Application

Fill directly into the diesel tank. Observe mixing ratio. Apply as possible at temperatures above  $32^{\circ}\text{F}$  and before the diesel is gelling. At temperatures below  $-4^{\circ}\text{F}$  can no longer be ensured mixing with the diesel fuel. Store frostproof!



#### Consumption

300 ml sufficient for 80 liters diesel. Mixing ratio: 1:200



#### Reaction time

while engine is running




#### Technical data

**Diesel Conditioner & Anti-Gel 1:200**  
Physical state: liquid  
Colour: clear/colourless  
Odour: characteristic  
Flashpoint:  $63^{\circ}\text{C}$   
Density at  $68^{\circ}\text{F}$ :  $0,82 - 0,83 \text{ g/cm}^3$



#### Available size

1L 5L 10L 25L 200L

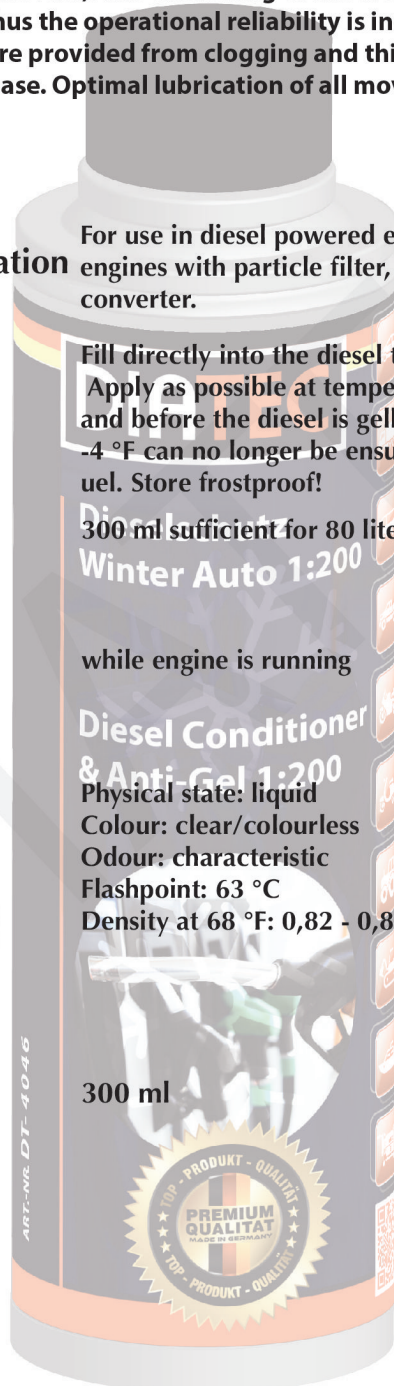

Diatec International GmbH  
Neuköllner Str 203 - 12357 Berlin  
Email : [info@dticc.com](mailto:info@dticc.com)

Website : [www.dticc.com](http://www.dticc.com)  
TEL: 0049177588641 / 00493098539728

# DIATEC®

Our information is based on careful examination and may be considered as reliable. However, all information supplied is a non-binding advise. No liability for printing errors, technical modifications and errors excepted.



Made in Germany