

# DT-1046

## Engine Oil Stop Leak (EOSL) Engine Oil Stop Leak

### Product Information Produktinformation



#### Product Properties:

The combination of highly efficient and innovative components regenerates plastic and rubber seals in the oil circuit and keeps it soft. The oil loss through seals or piston rings is reduced or stopped, which reduces the oil consumption. In addition, abrasion and wear will be considerably reduced, the viscosity of the oil is kept stable and works against the oxidation of the engine oil. The usable lifetime of the engine will be extended.



#### Application Area

For use in all 4-stroke- and diesel engines, transmissions, differentials, etc. This product is compatible with all commercially available oils.



#### Application

Add to oil system. We recommend an oil system cleaning with Engine Flush before using this product. Total Oil capacity according to manufacturer specifications must be observed.



#### Consumption

300ml sufficient for 5 liters of oil. Mixing ratio: 1:15



#### Reaction time

while engine is running




#### Technical data

Physical state: viscous  
Colour: brown  
Odour: mild  
Flashpoint: > 100 °C  
Density at 68 °F: 0.89 - 0.92 g/cm<sup>3</sup>  
Water resistant



#### Available size

1L 5L 10L 25L 200L

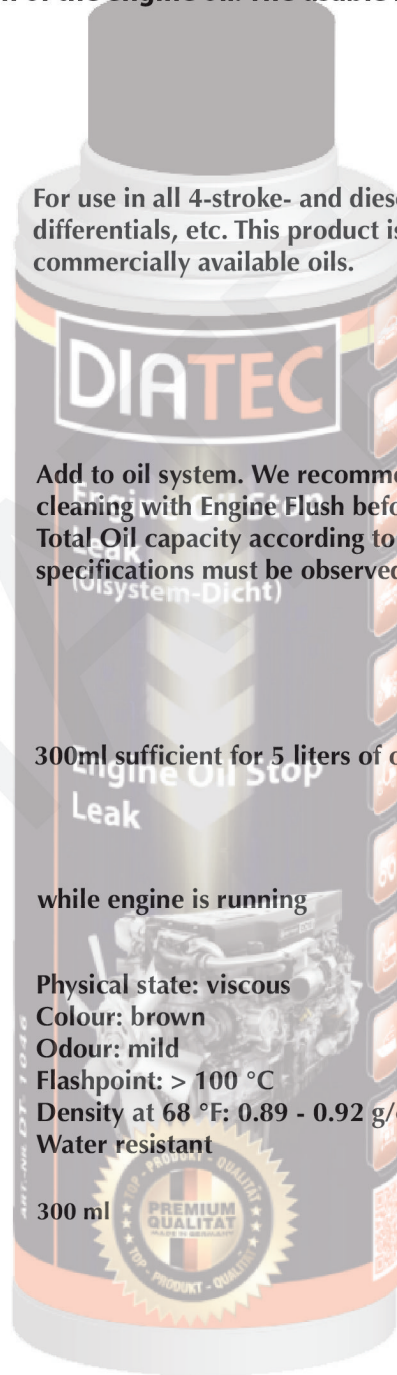

Diatec International GmbH  
Neuköllner Str 203 - 12357 Berlin  
Email : [info@dticc.com](mailto:info@dticc.com)  
Website : [www.dticc.com](http://www.dticc.com)  
TEL: 0049177588641 / 00493098539728

# DIATEC®

Our information is based on careful examination and may be considered as reliable. However, all information supplied is a non-binding advise. No liability for printing errors, technical modifications and errors excepted.



Made in Germany