

DT - 2046

Power Steering Cleaner (PSTC)

Power Steering Cleaner

Product Information

Produktinformation



Product properties:

Highly active special cleaning formula to remove contaminations throughout the whole system. Because of special lubrication components all parts are protected while the system is being cleaned.



Application Area

In all power steering systems, differentials, differential gears



Application

Before exchanging drain the amount of power steering fluid which will be added as cleaner. Fill the cleaner into the system. For perfect cleaning results, turn the steering 25 times to the left and to the right side as far as it will go. Afterwards drain the power steering liquid completely and refill new liquid in accordance to the manufacturer's instructions.



Consumption

300 ml for 3 ltr. Oil. Mix Ratio 1:30



Reaction time

Approx. 5-10 Minutes




Technical data

Physical state: liquid
Colour: blue
Odour: aromatic
Initial boiling point and boiling range: 180 - 220 °C
Flashpoint: 63 °C
Ignition temperature: > 200 °C
Vapour pressure (at 68 °F): 20 hPa
Density at 68 °F: 0,79 - 0,82 g/cm³
Water resistant



Available size

1L 5L 10L 25L 200L

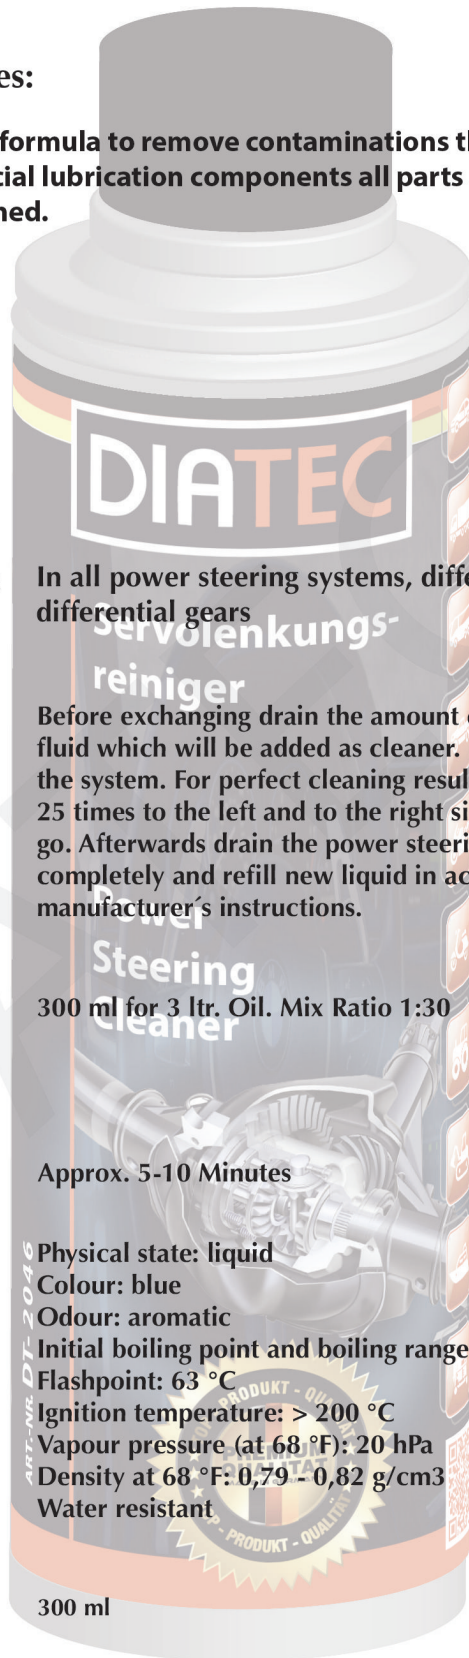

Diatec International GmbH
Neuköllner Str 203 - 12357 Berlin
TEL: 0049177588641 / 00493098539728
Website : www.dticc.com
Email : info@dticc.com

DIATEC®

Our information is based on careful examination and may be considered as reliable. However, all information supplied is a non-binding advise. No liability for printing errors, technical modifications and errors excepted.



Made in Germany